



SECTION B-B ELEVATION VIEW
STEEL REMOVABLE SIGN PANEL FRAMES

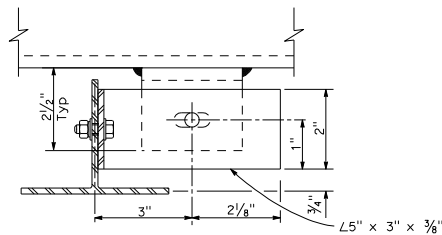

BOLTED ALTERNATIVE CONNECTION AT TOP CHORD
For details not shown, see Sections C-C and D-D.

NOTES:

1. For Steel Removable Sign Panel Frame details see Standard Plan S20.
2. Minimum fillet weld is $\frac{1}{4}$ " for clip angles welded to chord member of truss.
3. Maximum spacing of bottom clip angle is 5'-6".
4. Top clips required for each vertical member of Removable Sign Panel Frame.

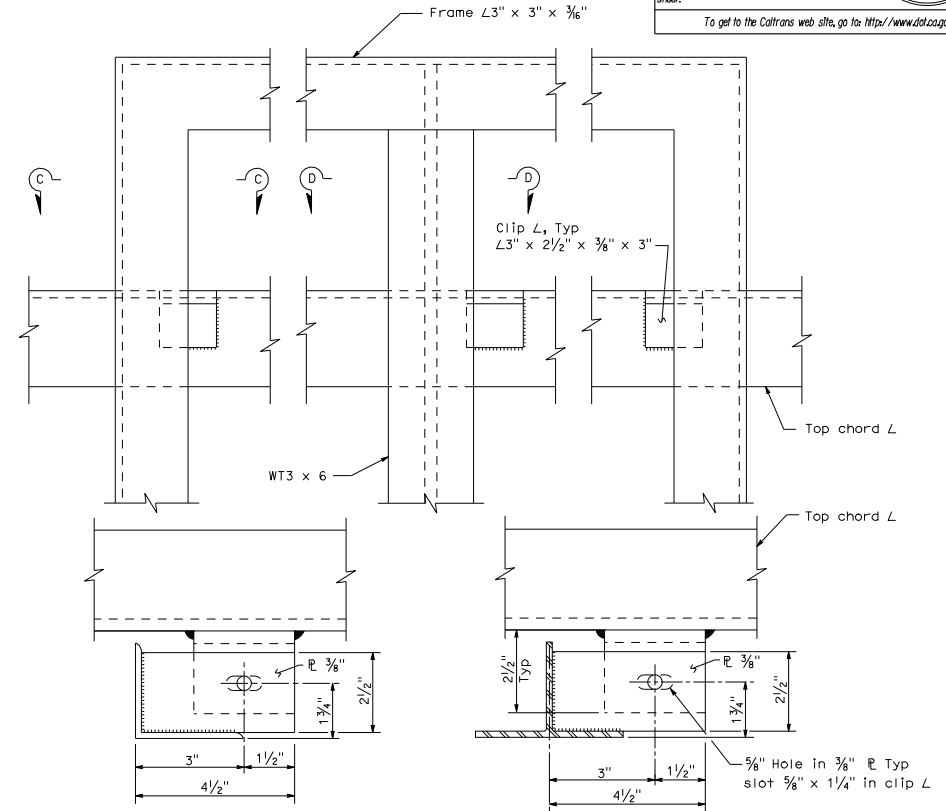

SECTION C-C

SECTION D-D

ALTERNATIVE CONNECTION AT TOP CHORD

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

OVERHEAD SIGNS-TRUSS REMOVABLE SIGN PANEL FRAMES 110" AND 120" SIGN PANELS

NO SCALE

S22

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

May 1, 2006
 PLANS APPROVAL DATE
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.
 To get to the Caltrans web site, go to <http://www.dot.ca.gov>

REGISTERED CIVIL ENGINEER
 Jeffrey B. Moody
 No. C41260
 Exp. 3-31-07
 CIVIL
 STATE OF CALIFORNIA